

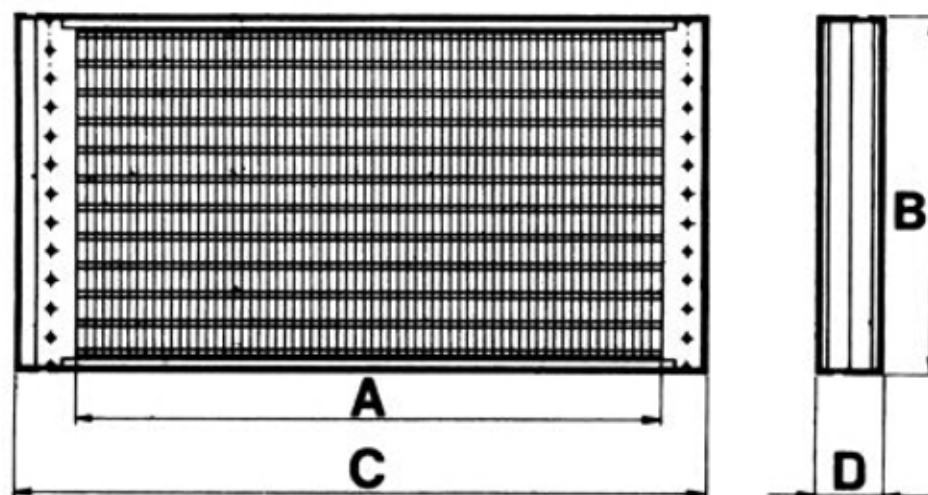



BATTERIE AD ACQUA REFRIGERATA CBW

Modello	Resa, W	Portata d'aria, m ³ /h	Caduta di pressione lato aria, Pa	Attacchi, mm	A mm	B mm	C mm	D mm
CBW 2 AR14T5R500	8500	1350	79	1	500	355	560	165
CBW 3 AR18T5R600	14890	2050	79	1	600	455	660	165
CBW 5 AR20T5R750	22760	3450	105	1	750	505	810	165
CBW 7,5 AR22T5R1000	33830	5100	110	1¼	1000	555	1060	165
CBW 10 AR22T5R1300	46940	6800	115	1½	1300	555	1360	165


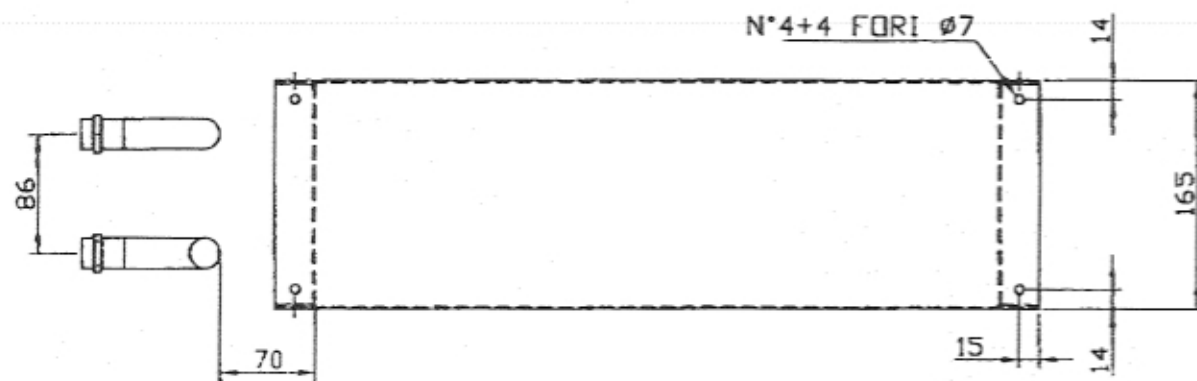


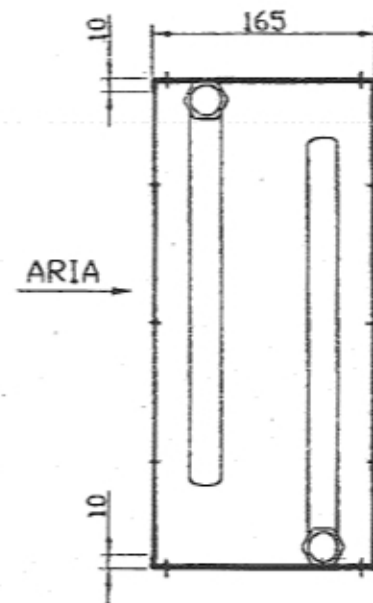




CBW 2

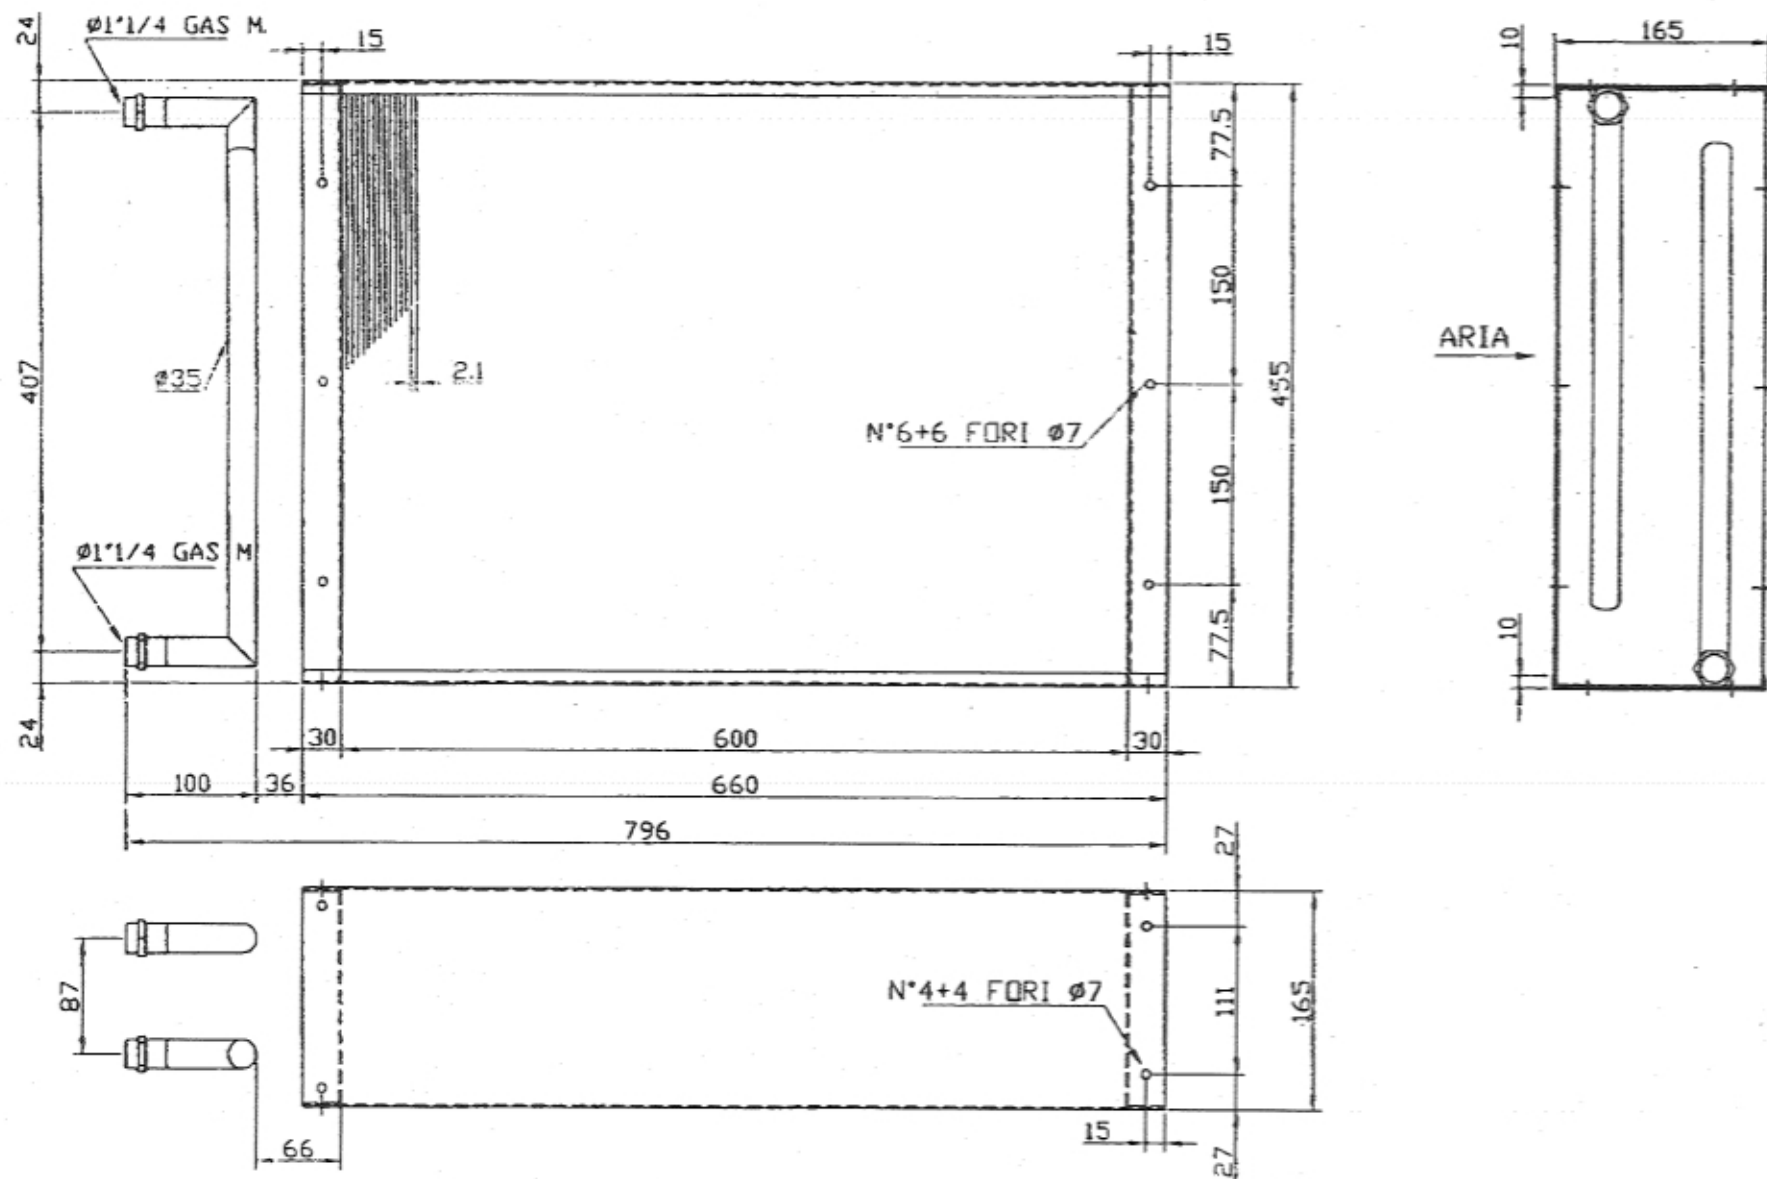




CBW 3

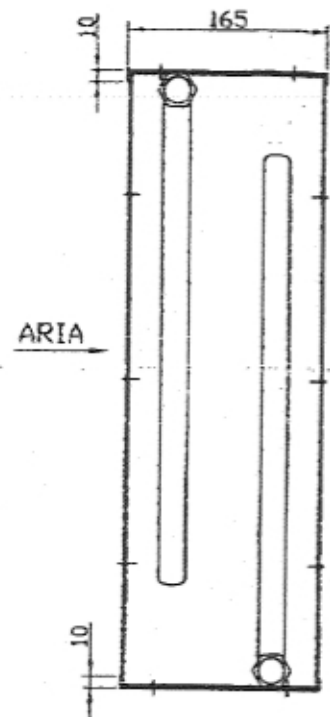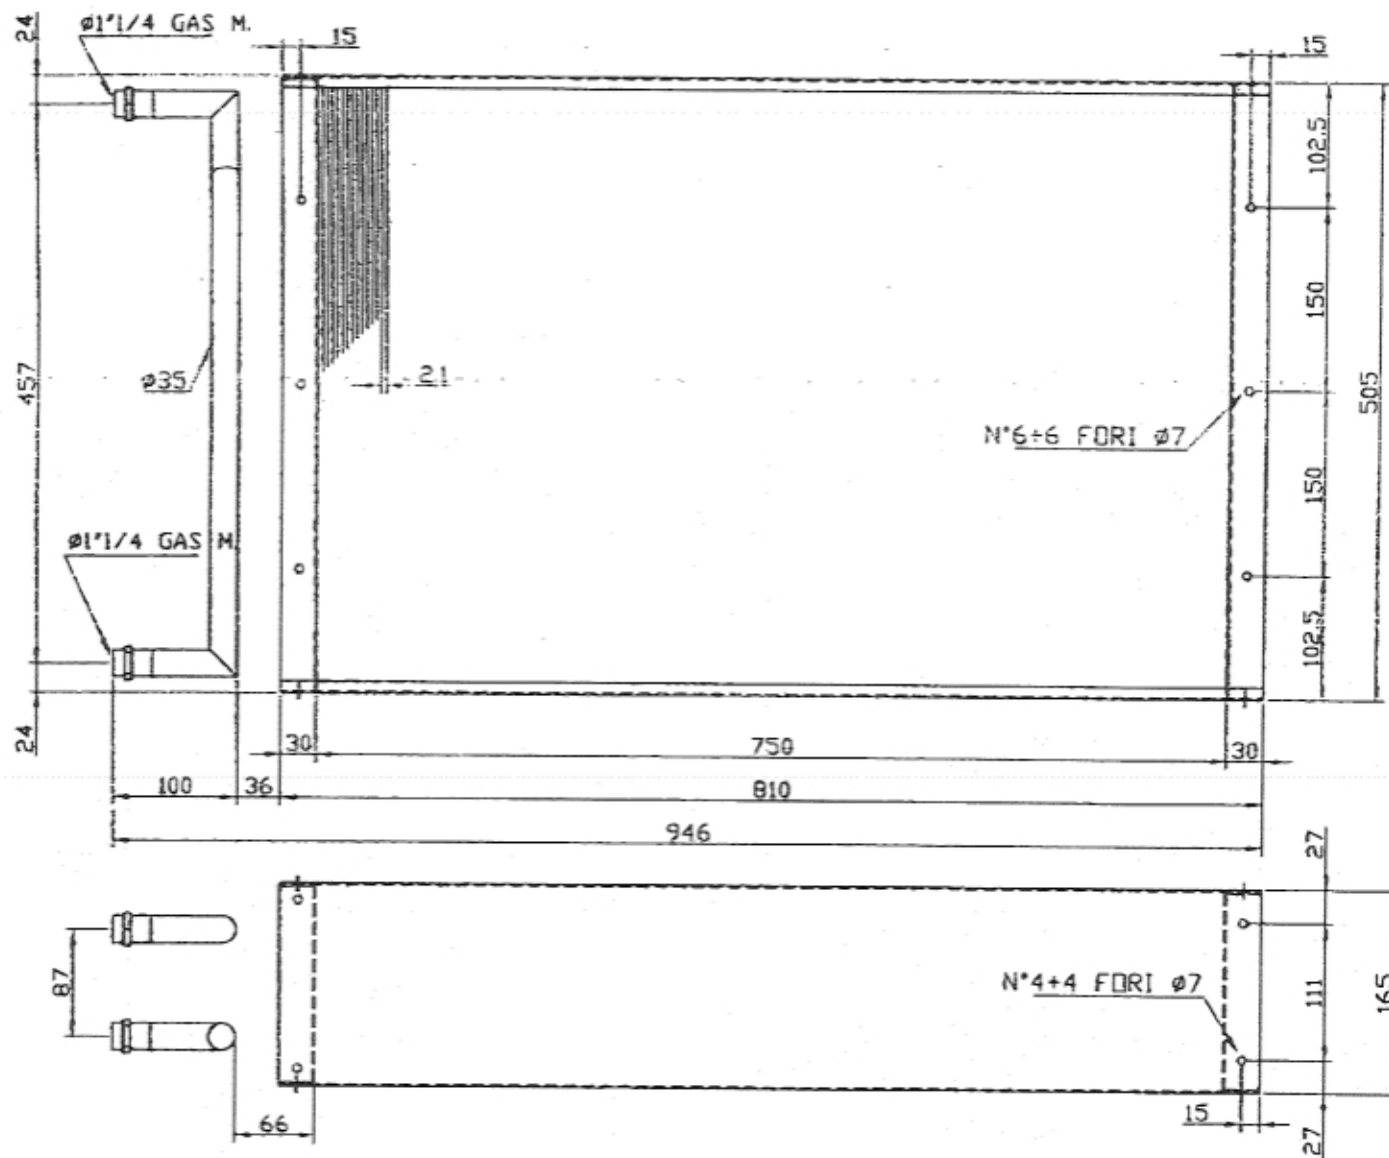

CBW 5

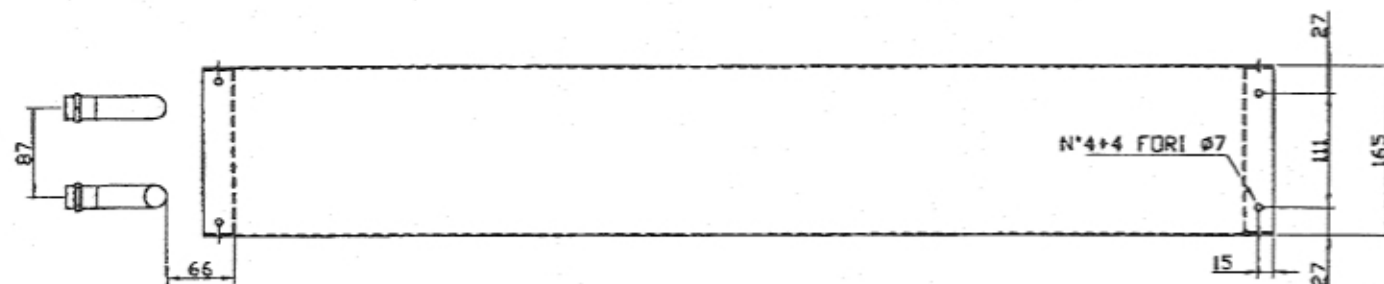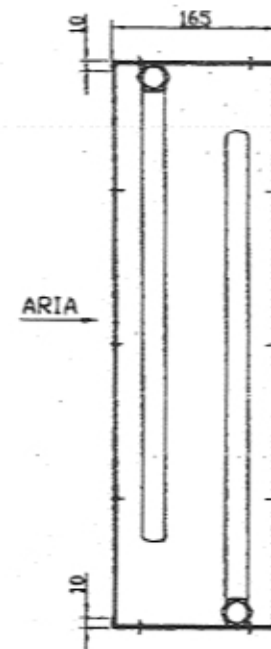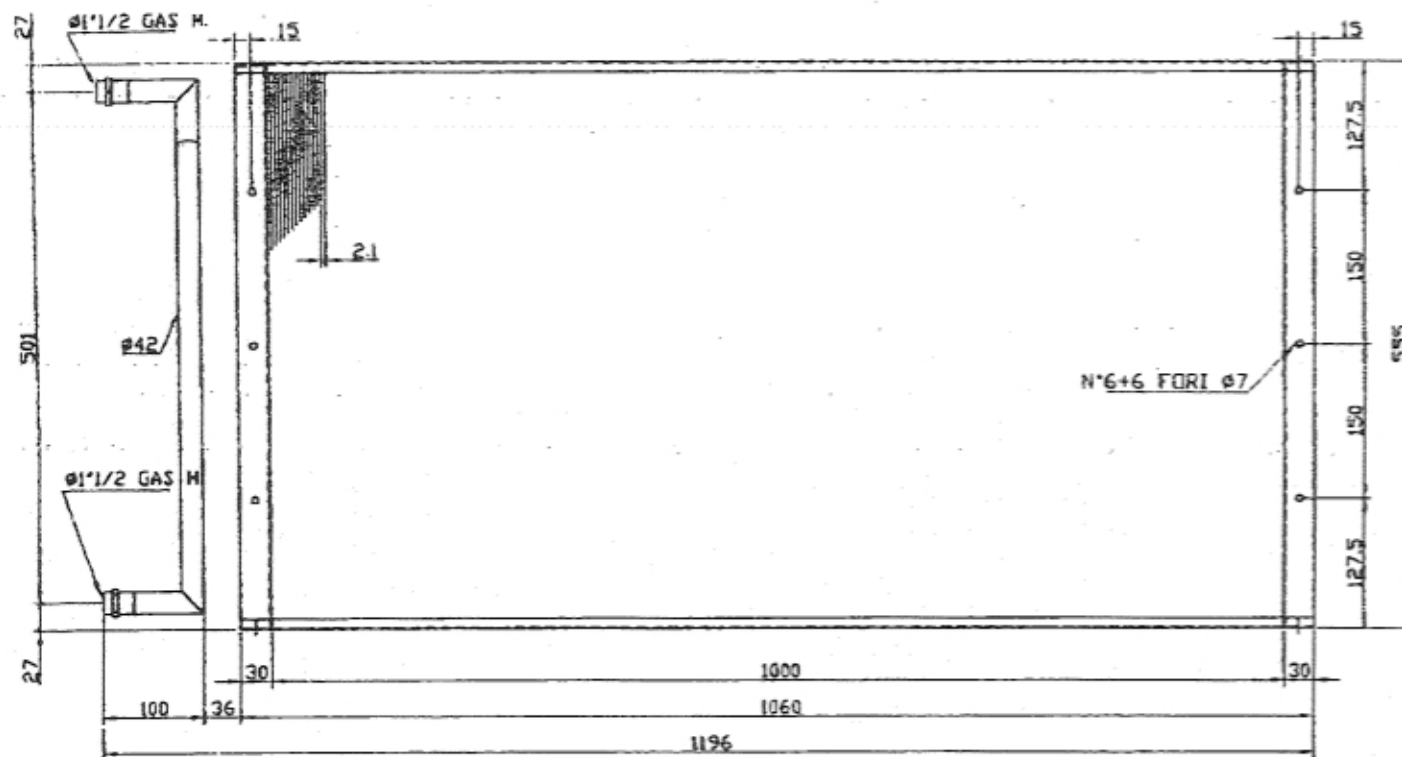

CBW 7,5

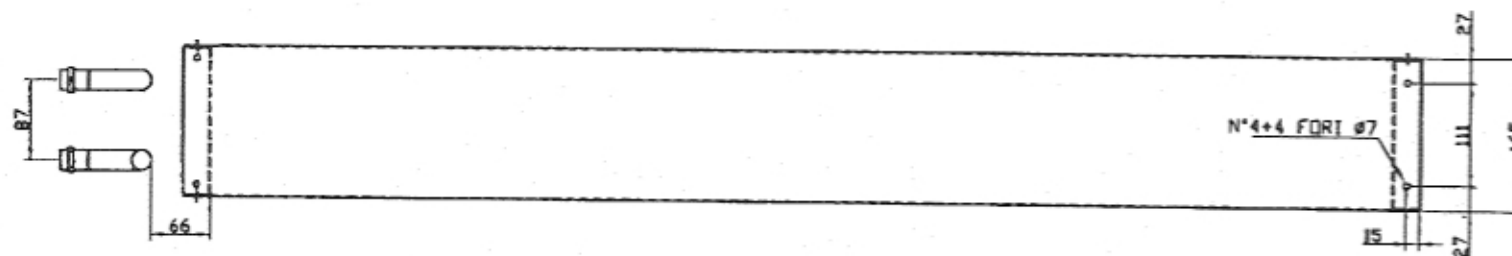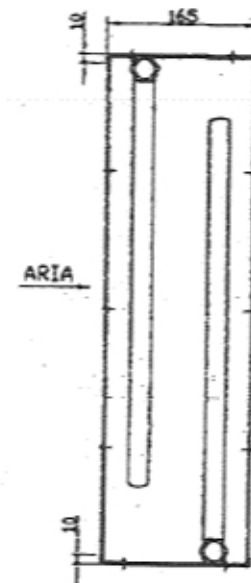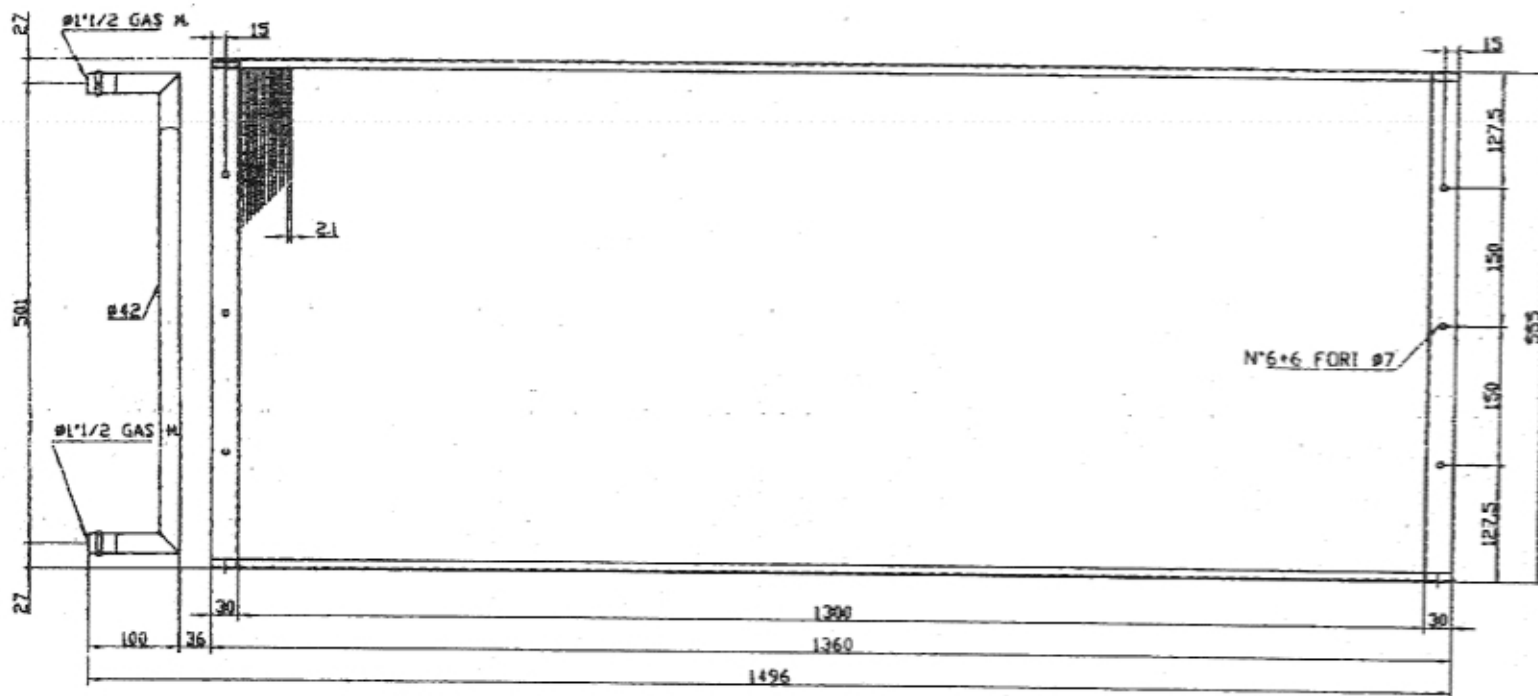

CBW 10