


TAAE92H5G AZ 9/9 1F 4P 1V

NICOTRA | **Gebhardt**

Zingonia 10000 m³/h test chamber
 Fan test laboratory AMCA 210/99 Fig. 12

Air Density (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 dB(A) free field noise measurements at 1 m

Type:	DDM 9/9	Watt:	550	Amp Max:	4.6
Motor:	E6G3501	Volt:	230 1~	Prot.:	IP 55
Test nr.:	3536.*	Hz:	50	T.H.:	YES-OUT
Date:	21/05/2009	Poles:	4	Ins. Cl.:	F
		μ F:	12.5/450 V		
		ErP	2015		

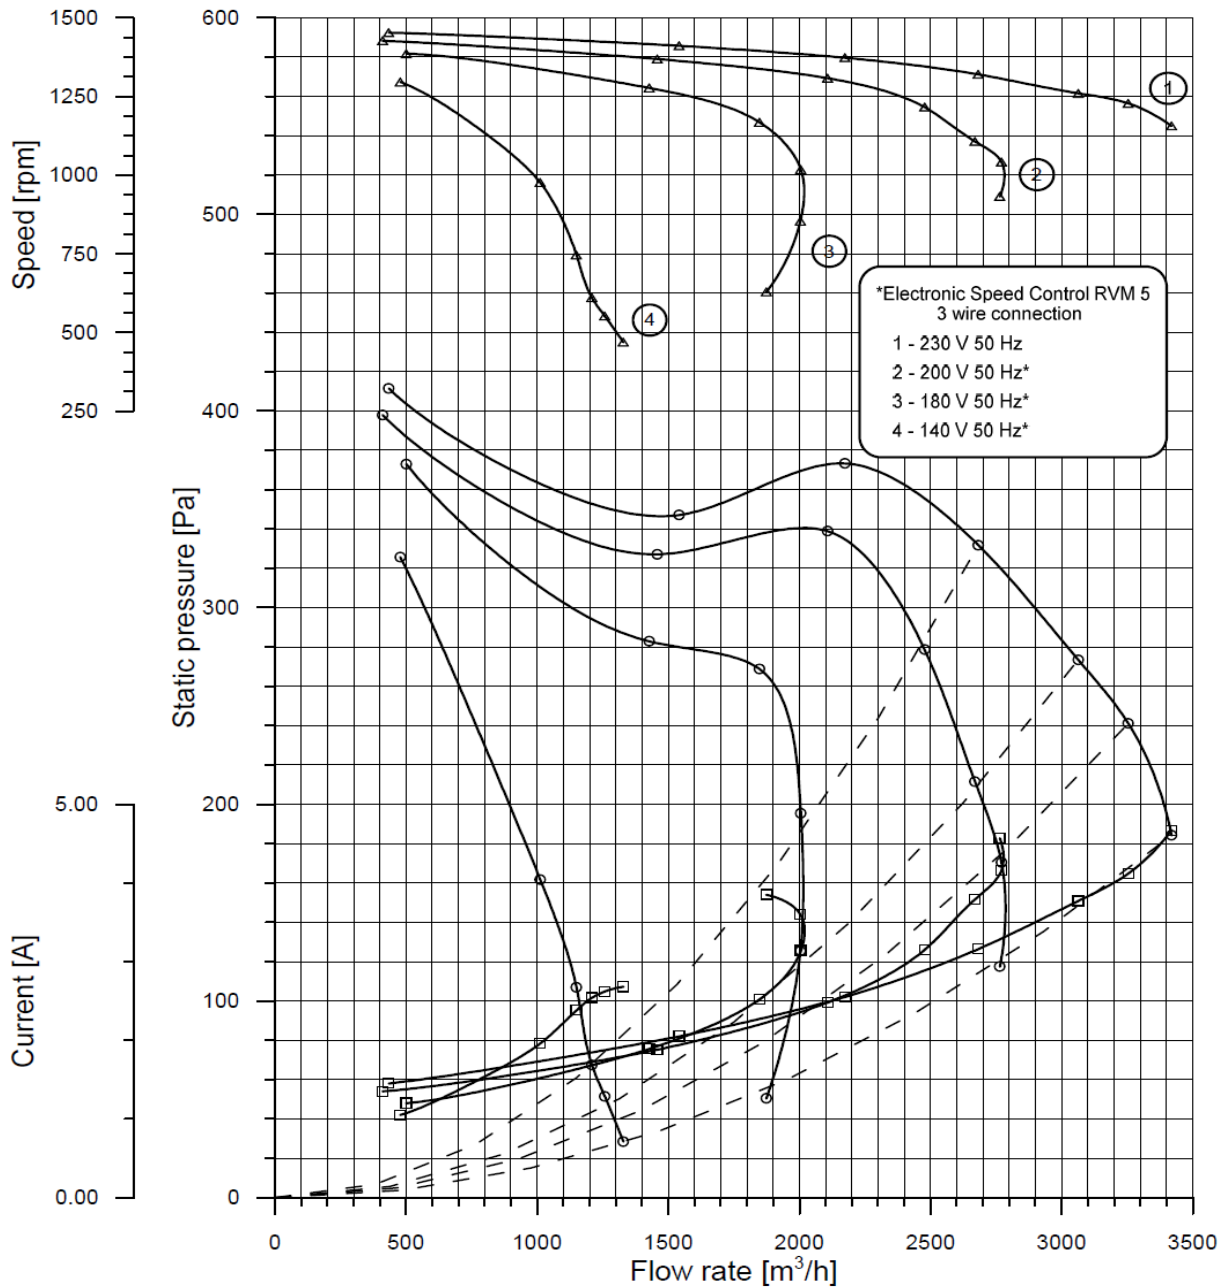

This test data obtained in a laboratory registered by AMCA for AMCA 210/99 air performance testing. Data is not certified by AMCA.

TAAE92K1 AZ 9/9 1F 4P 1V


NICOTRA | **Gebhardt**

Zingonia 10000 m³/h test chamber
 Fan test laboratory AMCA 210/99 Fig. 12

Air Density (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 dB(A) free field noise measurements at 1 m

Type:	DDM 9/9	Watt:	300	Amp Max:	2.4
Motor:	E6G3304	Volt:	230 1~	Prot.:	IP 55
Test nr.:	3715.*	Hz:	50	T.H.:	YES-OUT
Date:	03/11/2011	Poles:	4	Ins. Cl.:	F
		μ F:	10 / 450 V		

ErP 2015

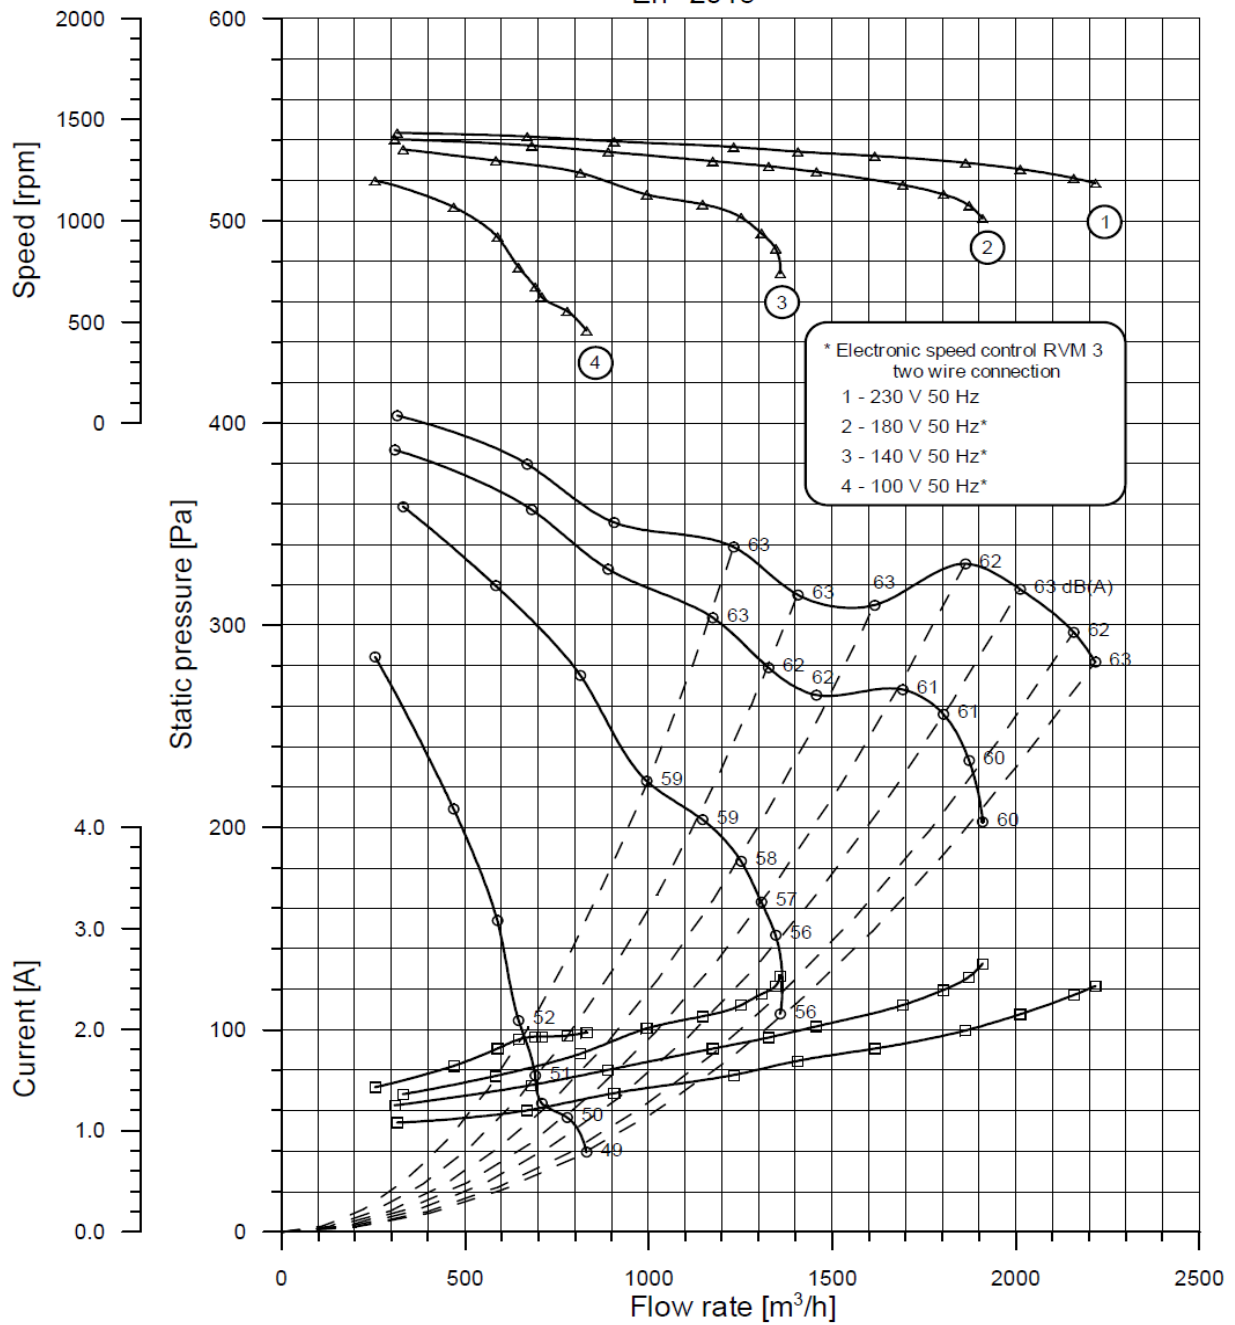

This test data obtained in a laboratory registered by AMCA for AMCA 210/99 air performance testing. Data is not certified by AMCA.

TAAE92W0G AZ 9/9 1F 4P 3V


NICOTRA | **Gebhardt**

Zingonia 10000 m³/h test chamber
 Fan test laboratory AMCA 210/99 Fig. 12

Air Density (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 dB(A) free field noise measurements at 1 m

Type:	DDM 9/9	Watt:	350	Amp Max:	3
Motor:	E6G3502	Volt:	230 1~	Prot.:	IP 55
Test nr.:	3705.*	Hz:	50	T.H.:	YES-OUT
Date:	18/10/2011	Poles:	4	Ins. Cl.:	F
		μ F	10 / 450 V		

ErP 2015

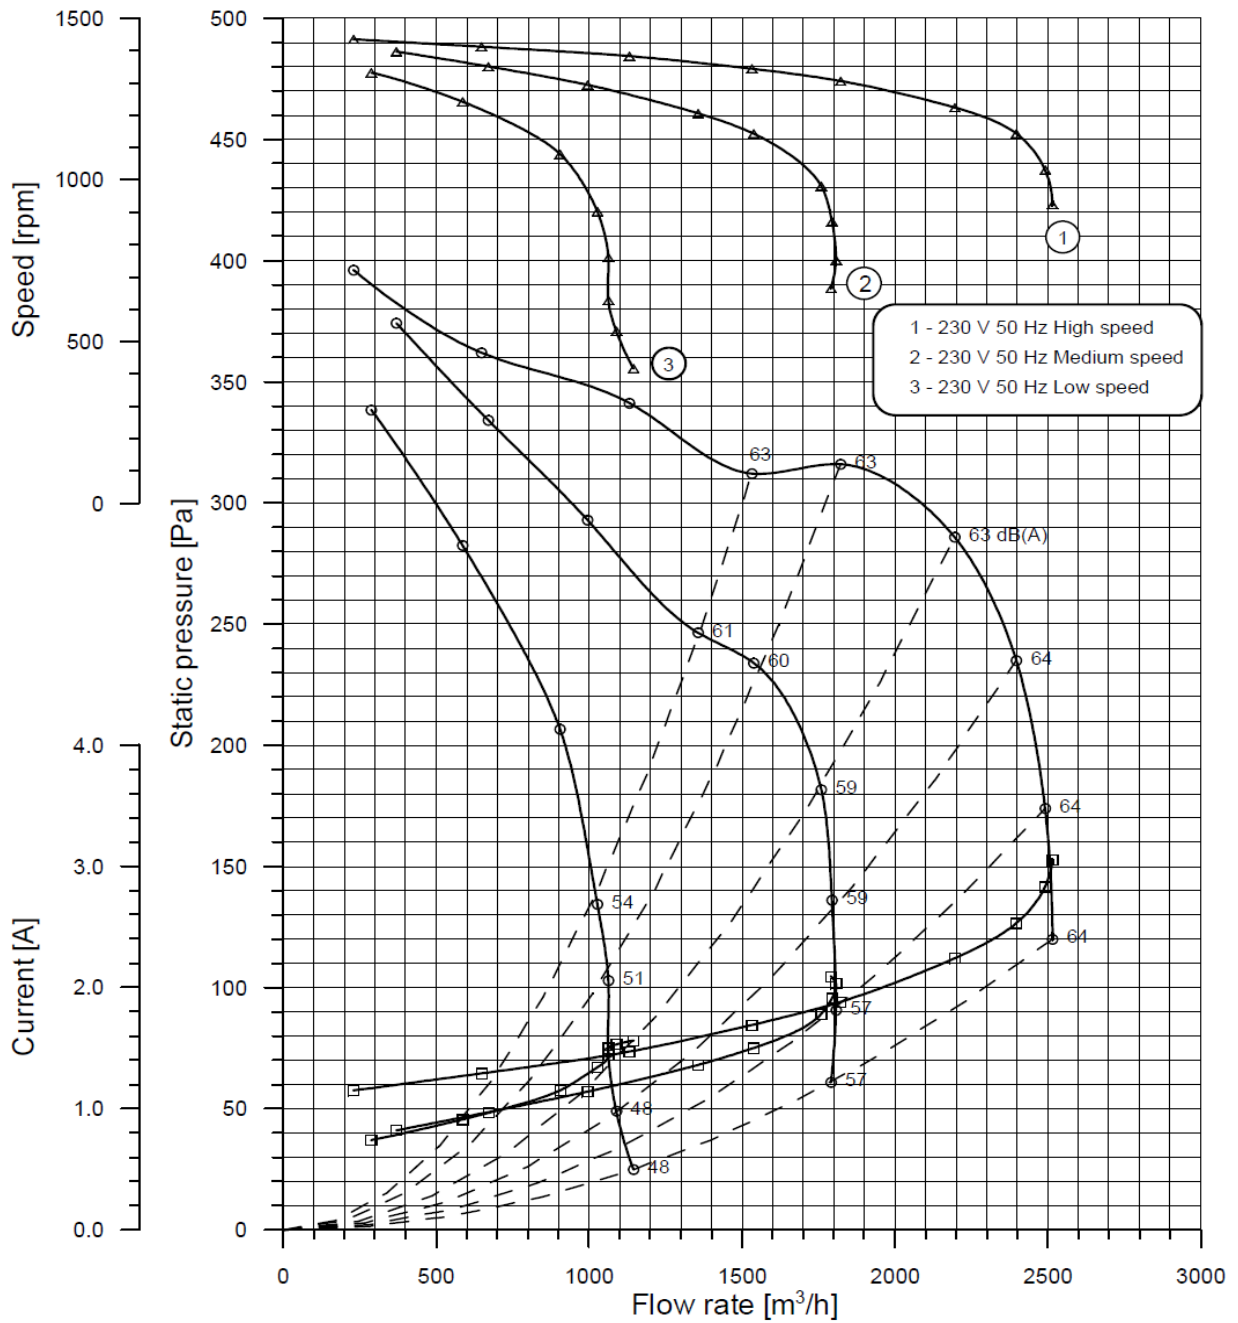

This test data obtained in a laboratory registered by AMCA for AMCA 210/99 air performance testing. Data is not certified by AMCA.

TAAE92XNG AZ 9/9 1F 4P 1V


NICOTRA | **Gebhardt**

Zingonia 10000 m³/h test chamber
 Fan test laboratory AMCA 210/99 Fig. 12

Air Density (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 dB(A) free field noise measurements at 1 m

Type:	DDM 9/9	Watt:	420	Amp Max:	3.6
Motor:	E6G3405	Volt:	230 1~	Prot.:	IP 55
Test nr.:	2760.*	Hz:	50	T.H.:	YES-OUT
Date:	18/06/2002	Poles:	4	Ins. Cl.:	F
		μ F:	16 / 450 V		

ErP 2015

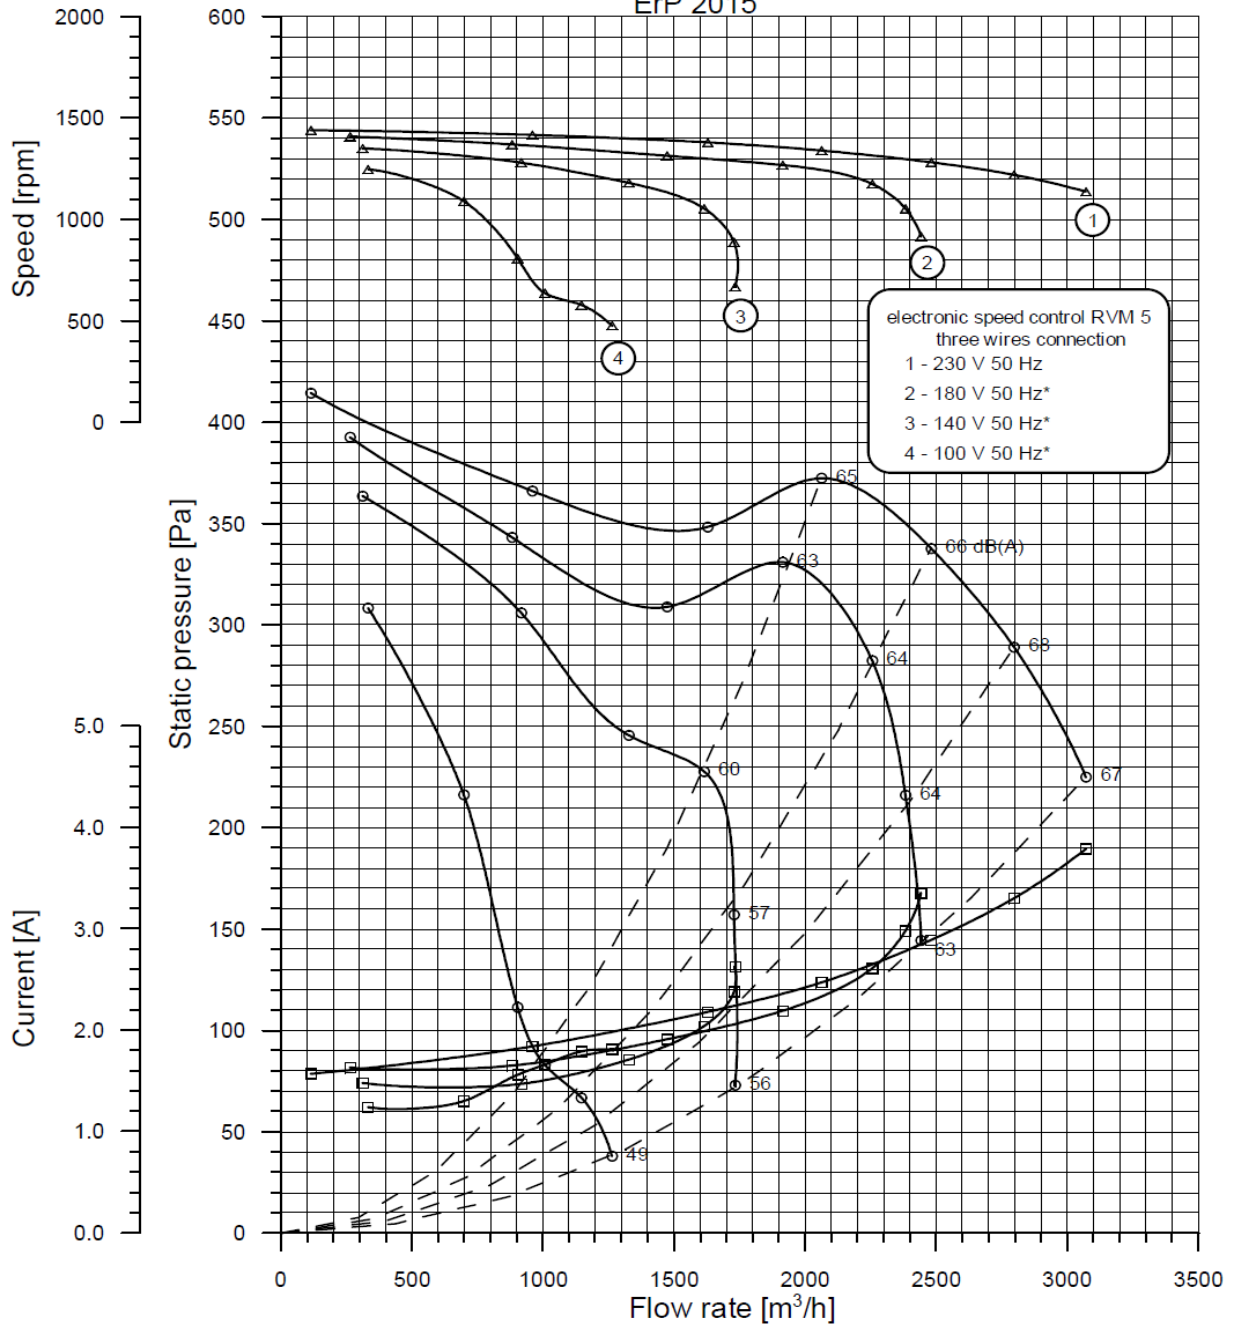

This test data obtained in a laboratory registered by AMCA for AMCA 210/99 air performance testing. Data is not certified by AMCA.